



FPS 4400

50 Hz



Table of Contents

4" Submersible Pumps

4400 Tri-Seal Pumps	2
18 LPM Tri-Seal	4
25 LPM Tri-Seal	6
30 LPM Tri-Seal	8
45 LPM Tri-Seal	10
60 LPM Tri-Seal	12
70 LPM Tri-Seal	14
4400 High Capacity Pumps	16
100 LPM High Capacity	18
150 LPM High Capacity	20
200 LPM High Capacity	22
270 LPM High Capacity	24



FPS

4400 Tri-Seal

The standard FPS 4400 4" submersible pump features the new Tri-Seal floating stage system. This new stage system further improves efficiency and protects against wear when pumping abrasives like sand. All FPS 4400 pumps are unconditionally guaranteed against sand locking for one full year.



Features:

- 300 series stainless steel hub floats with the impeller maintaining a positive seal.
- Phenolic washer provides downthrust protection.
- Celcon® impeller provides high efficiency performance and abrasion resistance.
- Noryl® diffuser and disc - proven abrasion resistant material.
- Floating stage design allows impeller to float independently.
- Removable, spring-loaded check valve.
- Maximum water temperature: 120 °F / 49 °C.
- Ceramic shaft sleeve and rubber discharge bearing protect shaft and eliminate sand wear.
- Powered by Franklin Electric corrosion resistant 4" submersible motors.

Celcon® is a Registered Trademark of the Celanese Corporation.

Noryl® is a Registered Trademark of G.E.

Patented impeller hub seal system seals radially and axially to prevent fluid recirculation, providing high performance in the harshest conditions.

CSA CERTIFIED
PUMP END ONLY



Drinking Water
NSF/ANSI 61

50 Hz Tri-Seal

4" Submersible Pumps

FPS

Tri-Seal™ Floating Stage System

U.S. Patent No. 7,290,984



Seal 1

Phenolic washer provides axial sealing as impeller floats in the stage.



Seal 2

Stainless steel hub seal is captured but not stationary, floating with the impeller for maximum sealing.

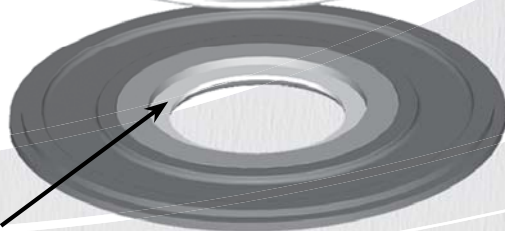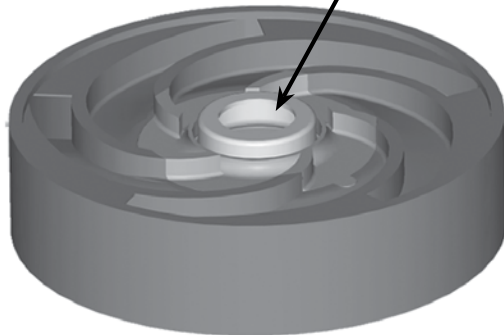

Seal 3

Stainless steel impeller eye seal.

FPS 4400

50 Hz Tri-Seal

18 LPM Tri-Seal


18 LPM Tri-Seal Ordering Information

Plastic

LPM	HP	kW	Stages	Model Description	Order No.
18	1/2	0.37	9	18FA05P4-PEXB	95690506
	3/4	0.55	13	18FA07P4-PEXB	95690511
	1	0.75	17	18FA1P4-PEXB	95690516
	1.5	1.1	26	18FA15P4-PEXB	95690521

Stainless Steel

LPM	HP	kW	Stages	Model Description	Order No.
18	1/2	0.37	9	18FA05S4-PEXB	95710506
	3/4	0.55	13	18FA07S4-PEXB	95710511
	1	0.75	17	18FA1S4-PEXB	95710516
	1.5	1.1	26	18FA15S4-PEXB	95710521
	2	1.5	35	18FA2S4-PEXB	95710526

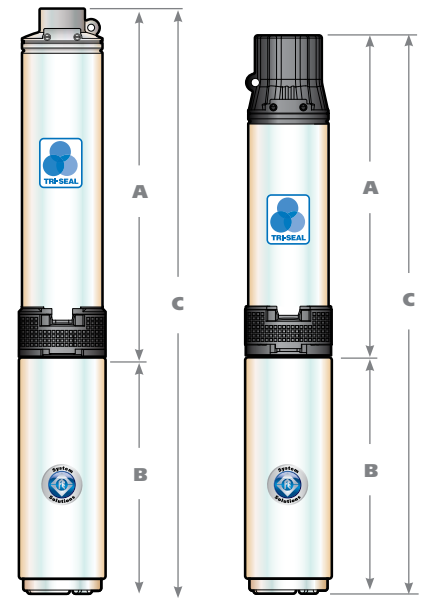

18 LPM Tri-Seal Dimensional Data

Plastic

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
18	1/2	0.37	370	242	611	370	242	611	3
	3/4	0.55	453	270	724	453	270	724	4
	1	0.75	535	298	833	535	298	833	5
	1.5	1.1	775	298	1073	775	345	1120	6

Stainless Steel

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
18	1/2	0.37	366	242	607	366	242	607	4
	3/4	0.55	449	270	719	449	270	719	5
	1	0.75	533	298	831	533	298	831	6
	1.5	1.1	774	298	1072	774	345	1119	7
	2	1.5	961	345	1307	961	384	1345	8


Note: P.E. – Pump end only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.
Maximum diameter with cable guard is 99.1 mm

50 Hz Tri-Seal



18 LPM Tri-Seal Performance Curves

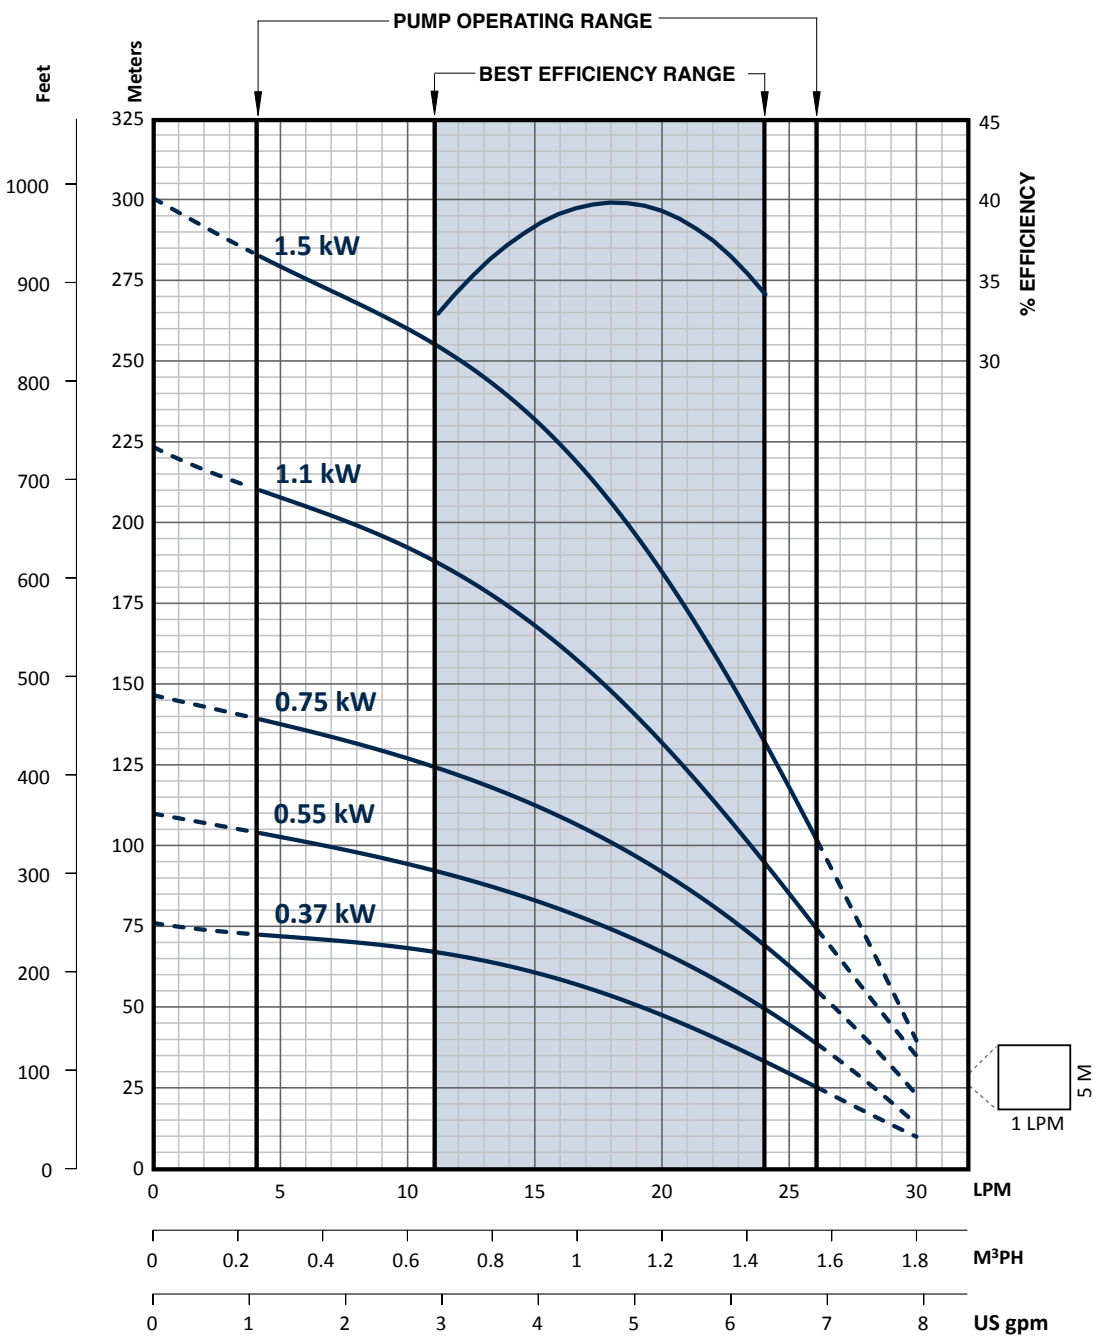

50 Hz Tri-Seal

25 LPM Tri-Seal


25 LPM Tri-Seal Ordering Information

Plastic

LPM	HP	kW	Stages	Model Description	Order No.
25	1/2	0.37	8	25FA05P4-PEXB	95690706
	3/4	0.55	12	25FA07P4-PEXB	95690711
	1	0.75	16	25FA1P4-PEXB	95690716
	1.5	1.1	24	25FA15P4-PEXB	95690721

Stainless Steel

LPM	HP	kW	Stages	Model Description	Order No.
25	1/2	0.37	8	25FA05S4-PEXB	95710706
	3/4	0.55	12	25FA07S4-PEXB	95710711
	1	0.75	16	25FA1S4-PEXB	95710716
	1.5	1.1	24	25FA15S4-PEXB	95710721
	2	1.5	32	25FA2S4-PEXB	95710726

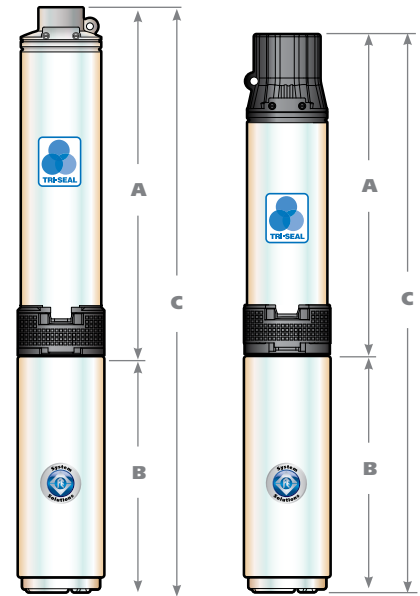

25 LPM Tri-Seal Dimensional Data

Plastic

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
25	1/2	0.37	349	242	591	349	242	591	2
	3/4	0.55	431	270	702	431	270	702	3
	1	0.75	514	298	812	514	298	812	5
	1.5	1.1	680	298	978	680	345	1026	6

Stainless Steel

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
25	1/2	0.37	345	242	586	345	242	586	3
	3/4	0.55	428	270	699	428	270	699	5
	1	0.75	512	298	810	512	298	810	6
	1.5	1.1	679	298	977	679	345	1024	7
	2	1.5	899	345	1244	899	384	1282	9

Note: P.E. – Pump end only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.


Maximum diameter with cable guard is 99.1 mm

50 Hz Tri-Seal

4" Submersible Pumps



25 LPM Tri-Seal Performance Curves

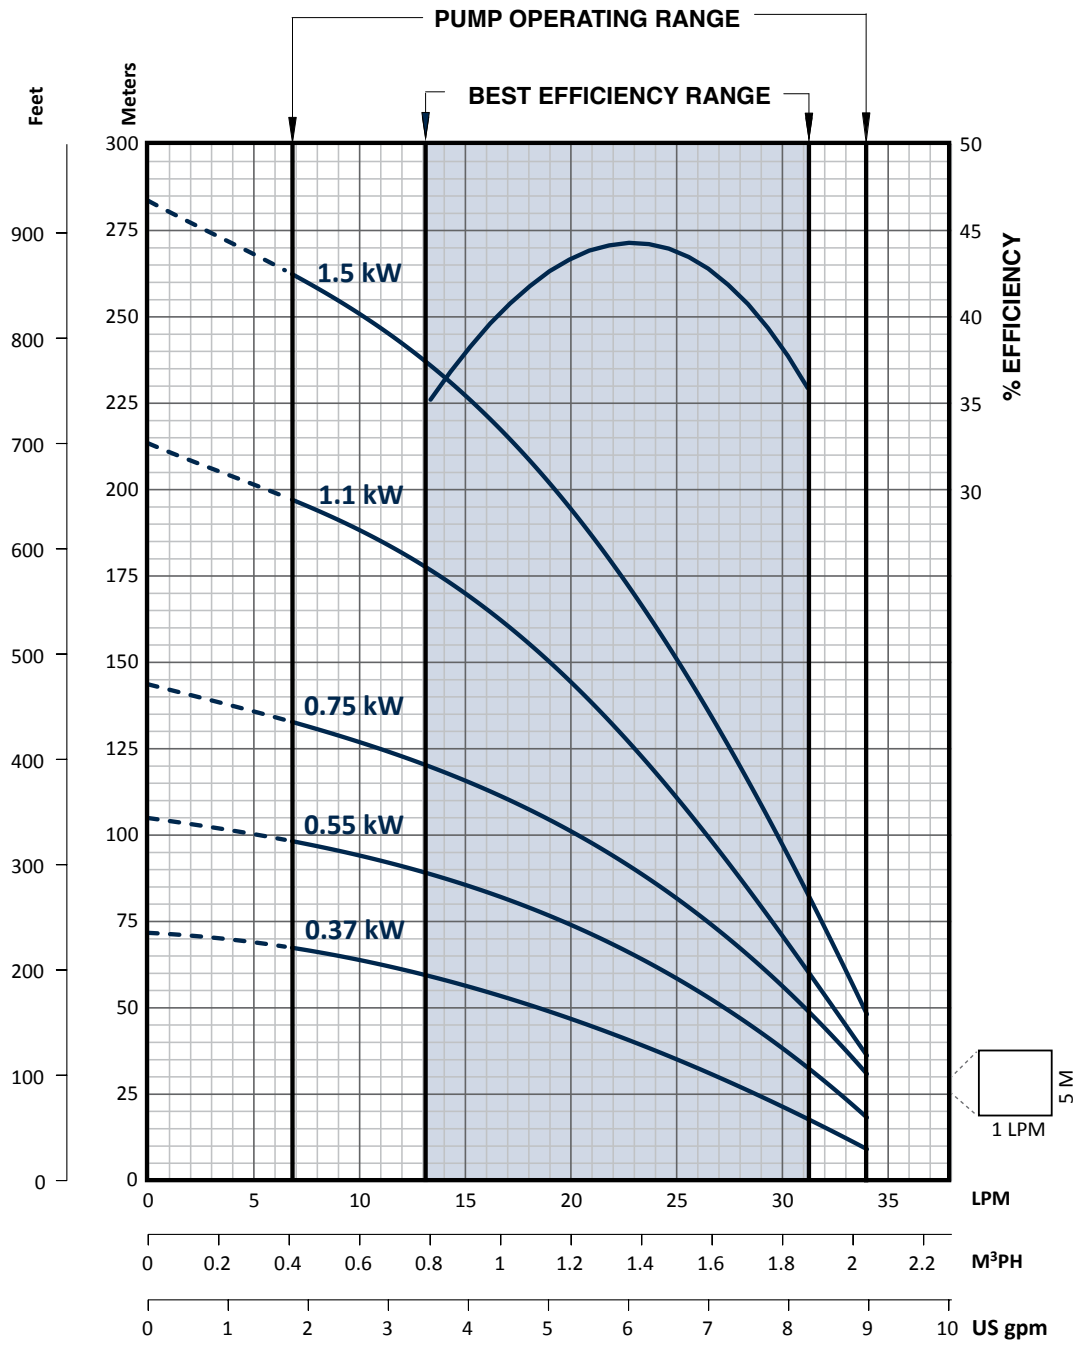

50 Hz Tri-Seal

30 LPM Tri-Seal


30 LPM Tri-Seal Ordering Information

Plastic

LPM	HP	kW	Stages	Model Description	Order No.
30	1/2	0.37	6	30FA05P4-PEXB	95691006
	3/4	0.55	8	30FA07P4-PEXB	95691011
	1	0.75	12	30FA1P4-PEXB	95691016
	1.5	1.1	18	30FA15P4-PEXB	95691021

Stainless Steel

LPM	HP	kW	Stages	Model Description	Order No.
30	1/2	0.37	6	30FA05S4-PEXB	95711006
	3/4	0.55	8	30FA07S4-PEXB	95711011
	1	0.75	12	30FA1S4-PEXB	95711016
	1.5	1.1	18	30FA15S4-PEXB	95711021
	2	1.5	24	30FA2S4-PEXB	95711026
	3	2.2	37	30FA3S4-PEXB	95711031
	5	3.7	59	30FA5S4-PEXB	95711036
	7.5	5.5	78	30FA7S4-PEXB	95711041

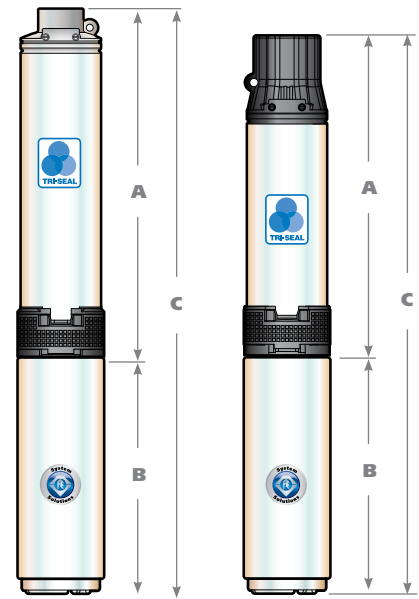

30 LPM Tri-Seal Dimensional Data

Plastic

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
30	1/2	0.37	320	242	561	320	242	561	2
	3/4	0.55	364	270	634	364	270	634	3
	1	0.75	465	298	763	465	298	763	3
	1.5	1.1	647	298	945	647	345	992	5

Stainless Steel

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
30	1/2	0.37	315	242	556	315	242	556	4
	3/4	0.55	359	270	629	359	270	629	4
	1	0.75	453	298	751	453	298	751	5
	1.5	1.1	642	298	940	642	345	987	7
	2	1.5	780	345	1125	780	384	1163	8
	3	2.2	1076	407	1484	1076	484	1560	9
	5	3.7	1676	589	2265	1676	741	2417	15
	7.5	5.5	2166	741	2907	N/A	N/A	N/A	19

Note: P.E. – Pump end only


Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

Maximum diameter with cable guard is 99.1 mm

50 Hz Tri-Seal



30 LPM Tri-Seal Performance Curves

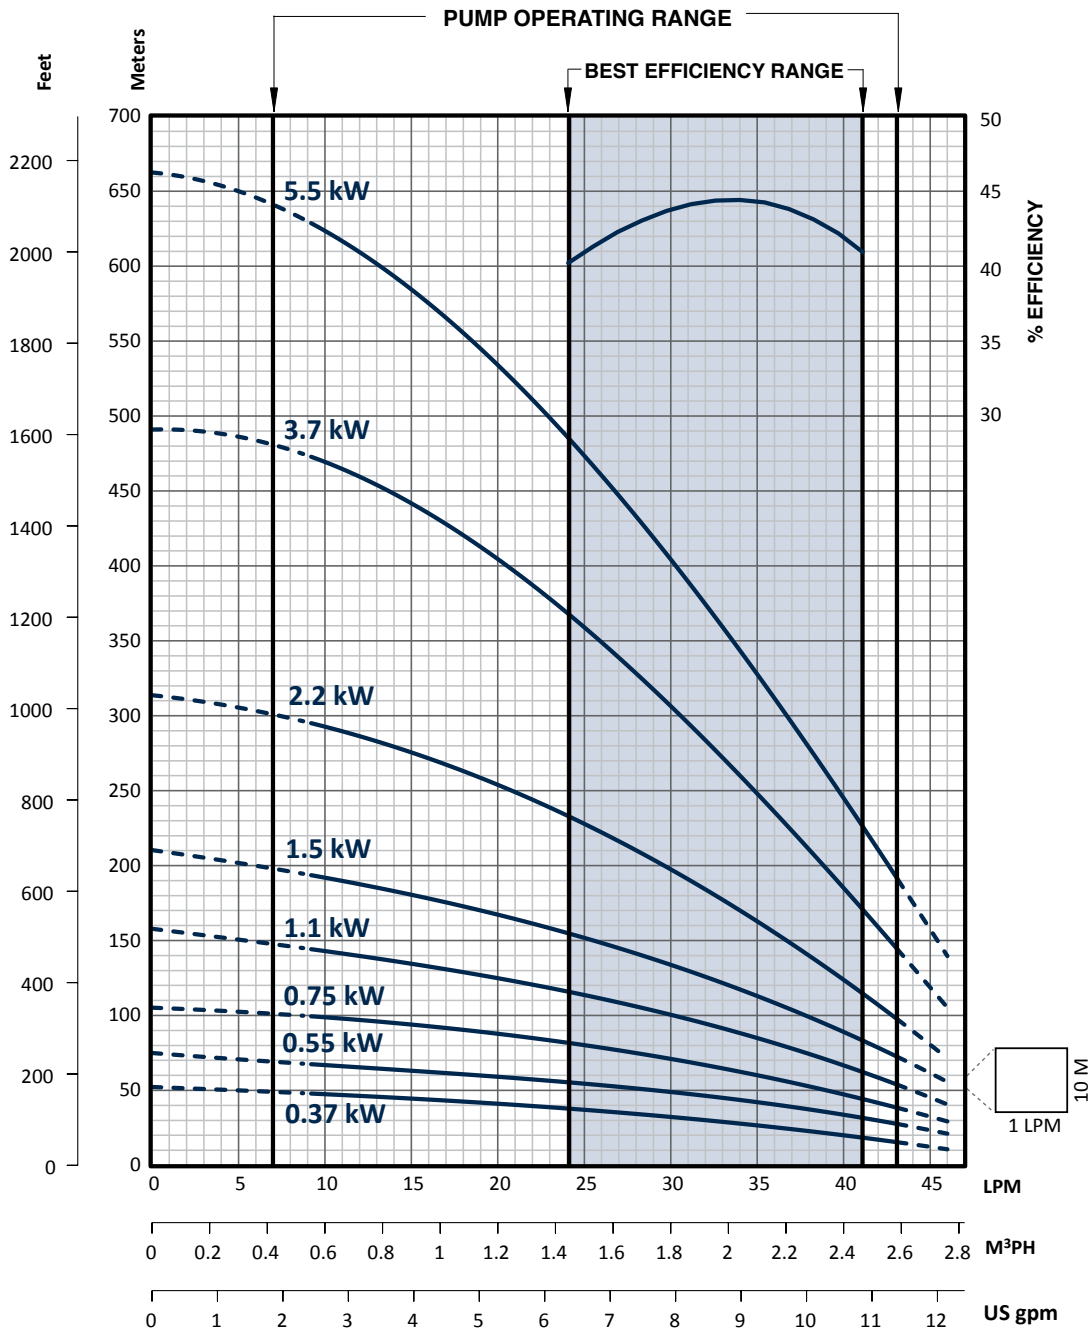

50 Hz Tri-Seal

45 LPM Tri-Seal


45 LPM Tri-Seal Ordering Information

Plastic

LPM	HP	kW	Stages	Model Description	Order No.
45	1/2	0.37	4	45FA05P4-PEXB	95691506
	3/4	0.55	8	45FA07P4-PEXB	95691511
	1	0.75	10	45FA1P4-PEXB	95691516
	1.5	1.1	15	45FA15P4-PEXB	95691521

Stainless Steel

LPM	HP	kW	Stages	Model Description	Order No.
45	1/2	0.37	4	45FA05S4-PEXB	95711506
	3/4	0.55	8	45FA07S4-PEXB	95711511
	1	0.75	10	45FA1S4-PEXB	95711516
	1.5	1.1	15	45FA15S4-PEXB	95711521
	2	1.5	19	45FA2S4-PEXB	95711526
	3	2.2	31	45FA3S4-PEXB	95711531
	5	3.7	46	45FA5S4-PEXB	95711536
	7.5	5.5	62	45FA7S4-PEXB	95711541

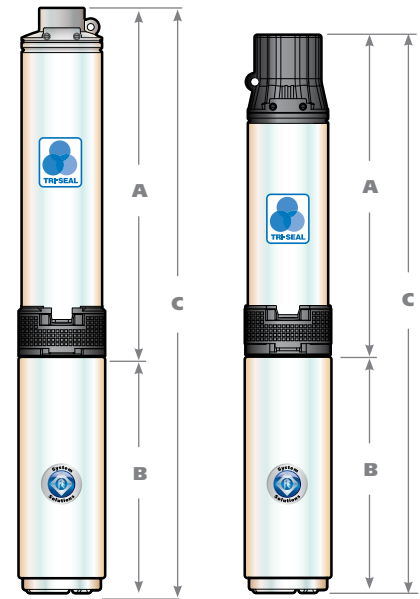

45 LPM Tri-Seal Dimensional Data

Plastic

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
45	1/2	0.37	279	242	520	281	241	522	2
	3/4	0.55	363	270	633	363	270	633	3
	1	0.75	410	298	708	410	298	708	3
	1.5	1.1	525	298	823	525	345	871	5

Stainless Steel

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
45	1/2	0.37	269	242	510	269	242	510	3
	3/4	0.55	361	270	631	361	270	631	4
	1	0.75	407	298	705	407	298	705	4
	1.5	1.1	521	298	819	521	345	867	6
	2	1.5	665	345	1010	665	384	1048	7
	3	2.2	940	407	1347	940	484	1423	9
	5	3.7	1379	589	1968	1379	741	2120	14
	7.5	5.5	1745	741	2486	N/A	N/A	N/A	18

Note: P.E. – Pump end only


Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.

Maximum diameter with cable guard is 99.1 mm

50 Hz Tri-Seal



45 LPM Tri-Seal Performance Curves

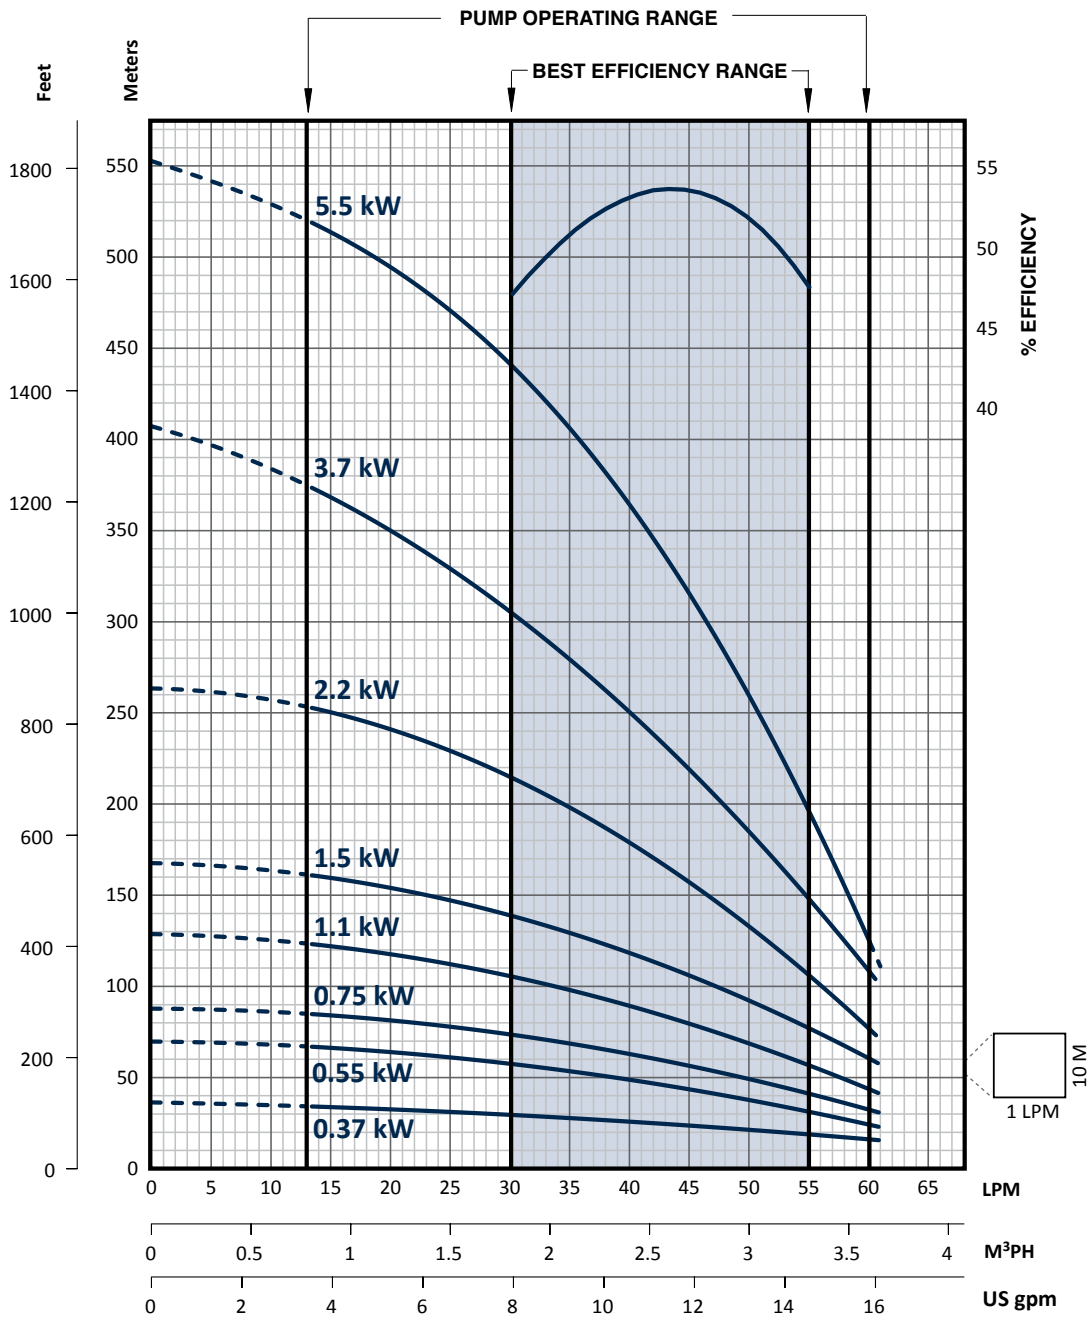

50 Hz Tri-Seal

60 LPM Tri-Seal


60 LPM Tri-Seal Ordering Information

Plastic

LPM	HP	kW	Stages	Model Description	Order No.
60	3/4	0.55	6	60FA07P4-PEXB	95692006
	1	0.75	8	60FA1P4-PEXB	95692011
	1.5	1.1	11	60FA15P4-PEXB	95692016

Stainless Steel

LPM	HP	kW	Stages	Model Description	Order No.
60	3/4	0.55	6	60FA07S4-PEXB	95712006
	1	0.75	8	60FA1S4-PEXB	95712011
	1.5	1.1	11	60FA15S4-PEXB	95712016
	2	1.5	16	60FA2S4-PEXB	95712021
	3	2.2	26	60FA3S4-PEXB	95712026
	5	3.7	39	60FA5S4-PEXB	95712036
	7.5	5.5	52	60FA7S4-PEXB	95712041

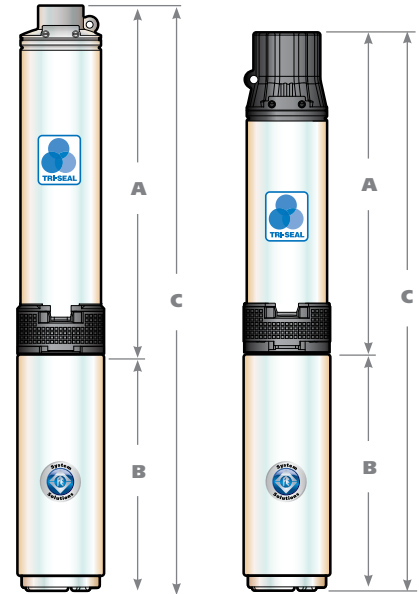

60 LPM Tri-Seal Dimensional Data

Plastic

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
60	3/4	0.55	368	270	639	368	270	639	3
	1	0.75	430	298	728	430	298	728	4
	1.5	1.1	524	298	822	524	345	870	4

Stainless Steel

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
60	3/4	0.55	364	270	634	364	270	634	4
	1	0.75	426	298	724	426	298	724	4
	1.5	1.1	520	298	818	520	345	865	6
	2	1.5	674	345	1020	674	384	1058	6
	3	2.2	1038	407	1445	1038	484	1522	8
	5	3.7	1544	589	2133	1544	741	2285	13
	7.5	5.5	1948	741	2689	N/A	N/A	N/A	16


Note: P.E. – Pump end only

Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.
Maximum diameter with cable guard is 99.1 mm

50 Hz Tri-Seal



60 LPM Tri-Seal Performance Curves

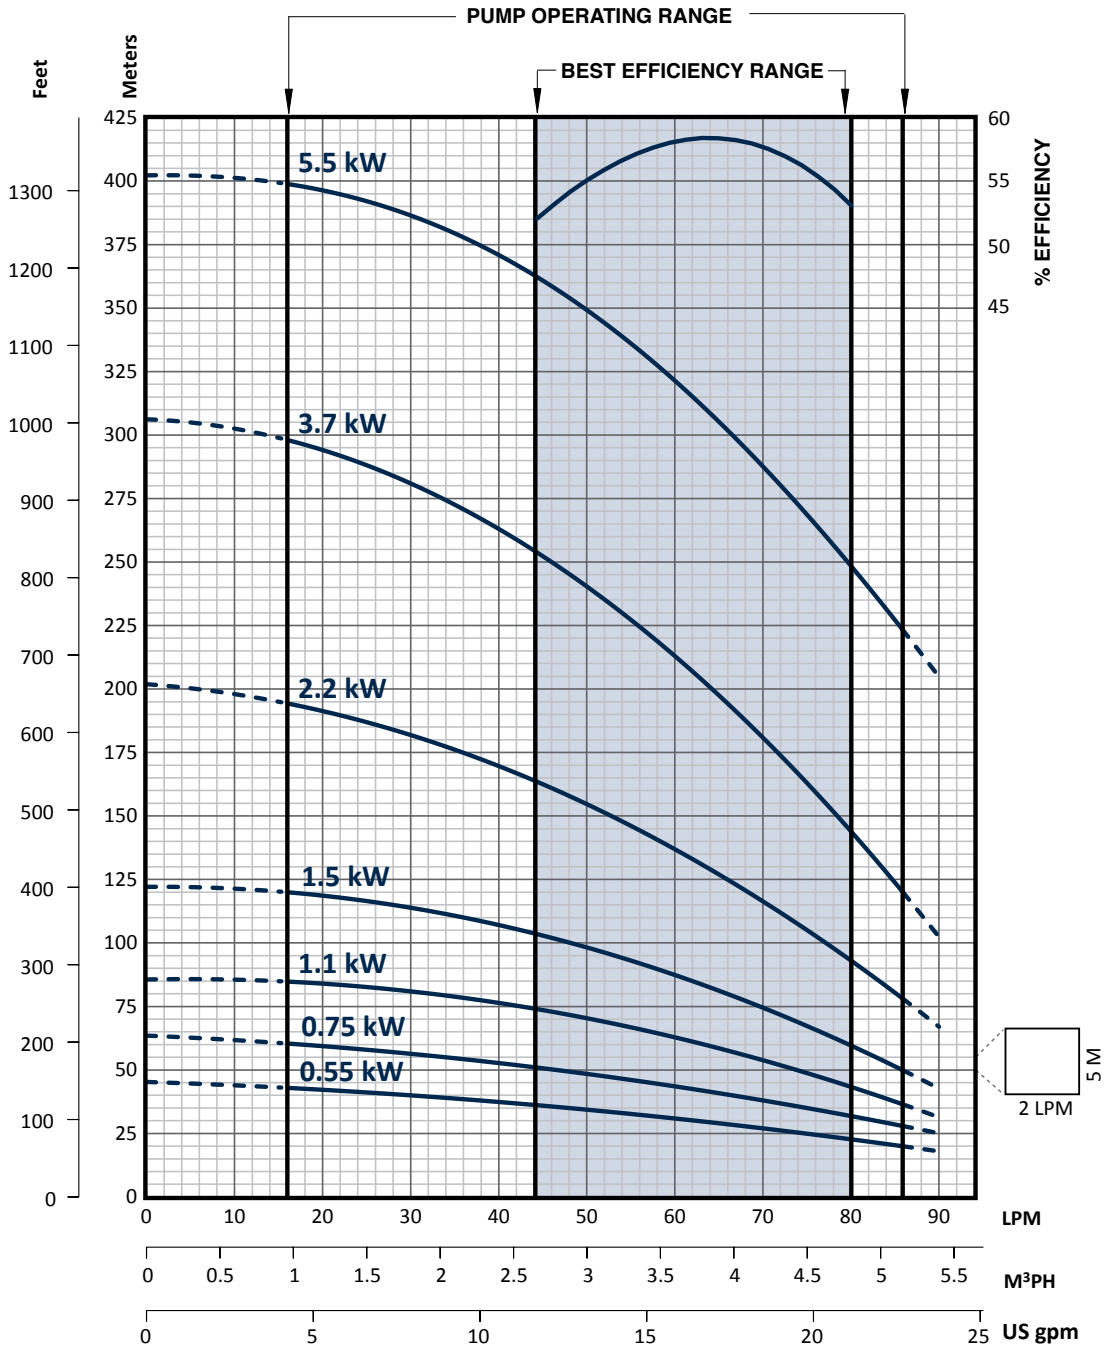

50 Hz Tri-Seal

70 LPM Tri-Seal


70 LPM Tri-Seal Ordering Information

Plastic

LPM	HP	kW	Stages	Model Description	Order No.
70	1	0.75	7	70FA1P4-PEXB	95692506
	1.5	1.1	10	70FA15P4-PEXB	95692511

Stainless Steel

LPM	HP	kW	Stages	Model Description	Order No.
70	1	0.75	7	70FA1S4-PEXB	95712506
	1.5	1.1	10	70FA15S4-PEXB	95712511
	2	1.5	14	70FA2S4-PEXB	95712516
	3	2.2	22	70FA3S4-PEXB	95712521
	5	3.7	35	70FA5S4-PEXB	95712536
	7.5	5.5	44	70FA7S4-PEXB	95712541

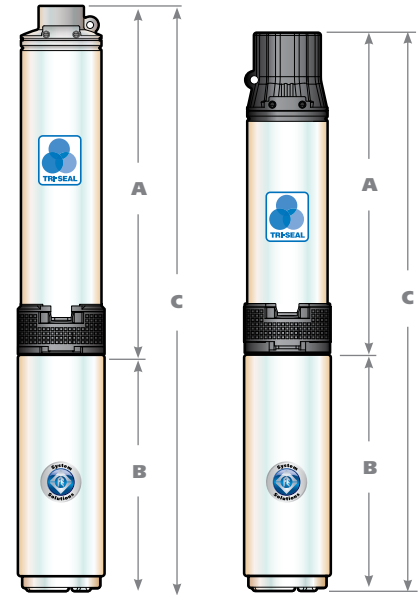

70 LPM Tri-Seal Dimensional Data

Plastic

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
70	1	0.75	399	298	697	399	298	697	4
	1.5	1.1	493	298	791	493	345	839	5

Stainless Steel

LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
70	1	0.75	395	298	693	395	298	693	4
	1.5	1.1	488	298	786	488	345	834	5
	2	1.5	612	345	958	612	384	996	6
	3	2.2	913	407	1321	913	484	1397	7
	5	3.7	1420	589	2009	1420	741	2161	12
	7.5	5.5	1699	741	2440	N/A	N/A	N/A	14

Note: P.E. – Pump end only


Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.
Maximum diameter with cable guard is 99.1 mm

50 Hz Tri-Seal

4" Submersible Pumps



70 LPM Tri-Seal Performance Curves

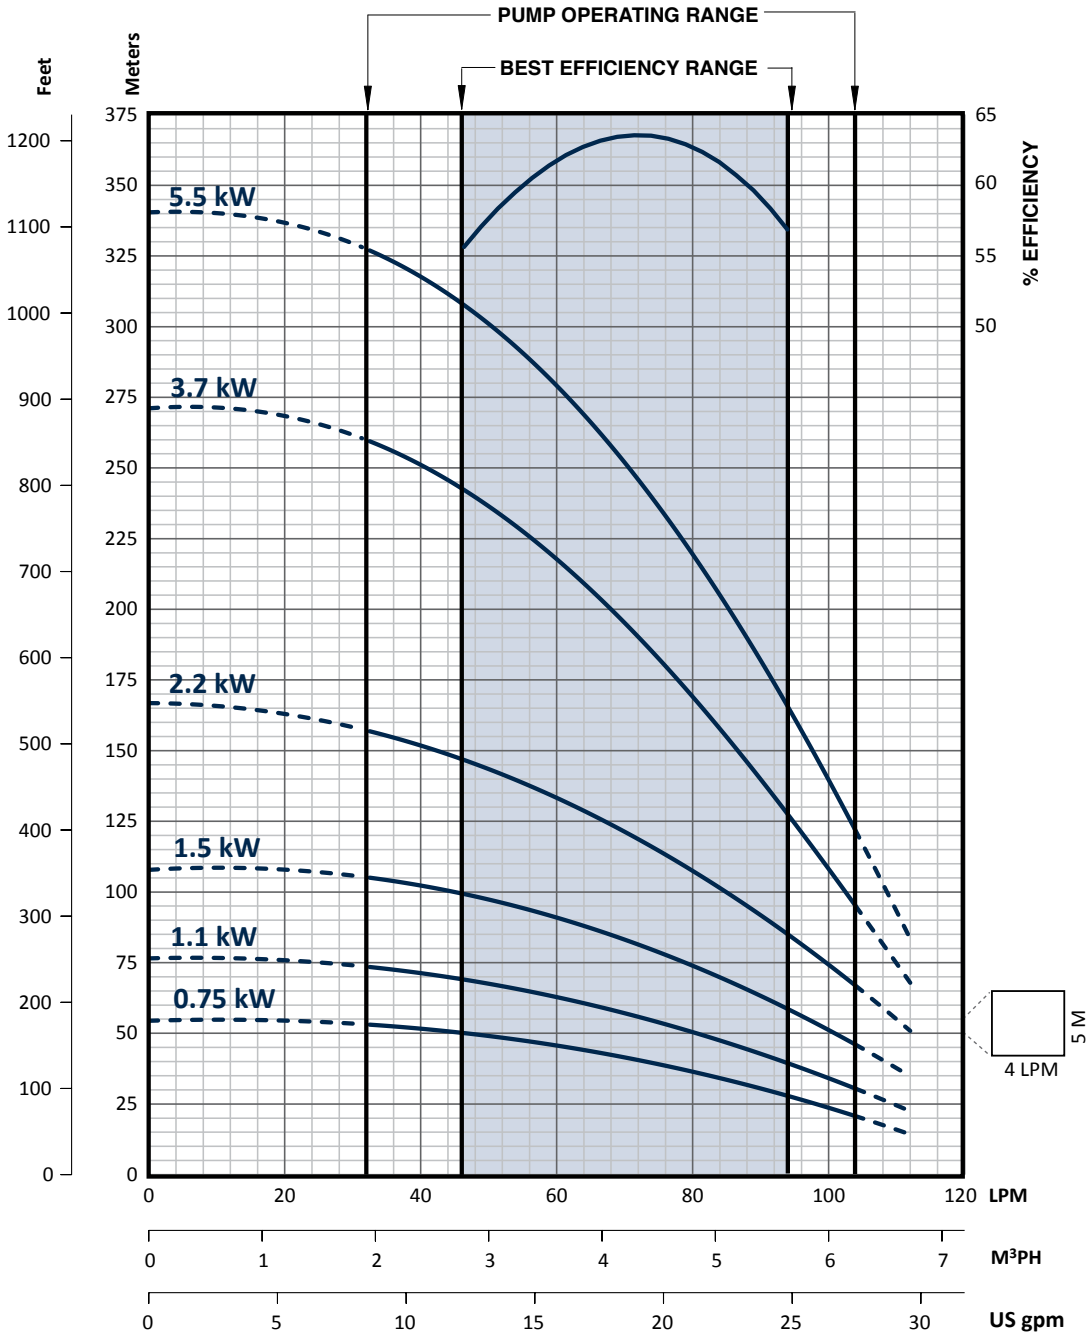



4400 High Capacity

The FPS 4400 High Capacity pump is engineered for commercial, irrigation and residential use. Design advancements reduce efficiency losses caused by internal pump leakage and abrasives. All FPS 4400 pumps are unconditionally guaranteed against sand locking for one full year.


Features:

- 4 performance ranges: 100, 150, 200 & 270 LPM.
- Stainless steel discharge head and motor bracket.
- High flow impellers and stages are glass-filled Noryl for maximum efficiency.
- Ceramic shaft sleeve and rubber discharge bearing eliminates sand wear.
- Intermediate bearing for increased shaft stability.
- Floating eye and hub seals improve performance and efficiency.
- Stainless steel hex pump shaft, shell and shaft coupling.
- High capacity upthrust assembly for protection during start-up and operation (150, 200 & 270 LPM models).
- Powered by Franklin Electric's corrosion-resistant 4" submersible motor.
- 2" BSPP discharge threads.
- External check valve must be ordered separately.

50 Hz High Capacity

4" Submersible Pumps

FPS

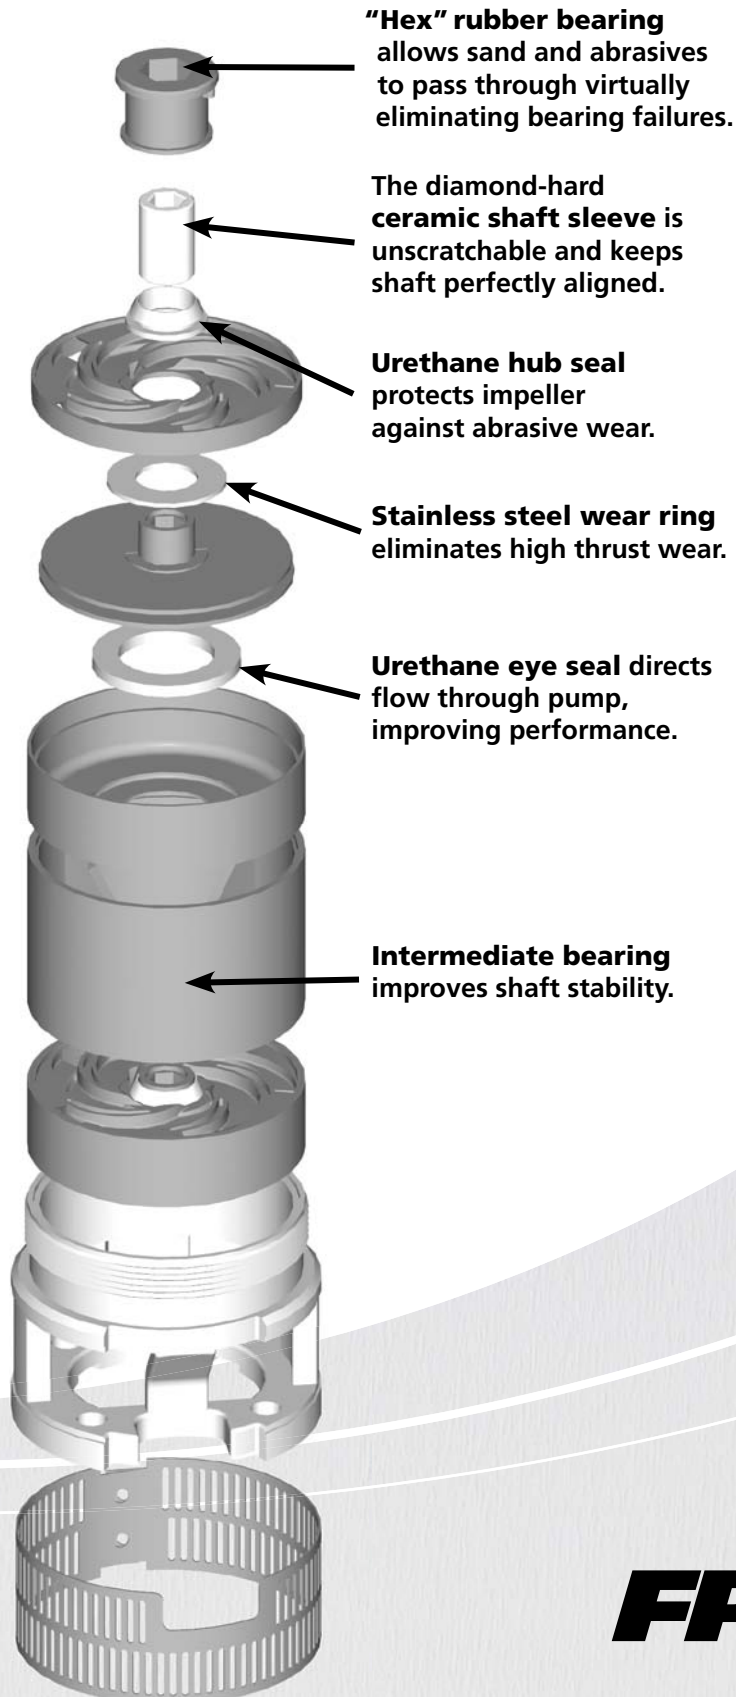

FPS 4400


50 Hz High Capacity



100 LPM High Capacity

100 LPM Hi-Cap Ordering Information Stainless Steel

LPM	HP	kW	Stages	Model Description	Order No.
100	3/4	0.55	6	100FA07S4-PEXB	93616306
	1	0.75	8	100FA1S4-PEXB	93616308
	1.5	1.1	10	100FA15S4-PEXB	93616310
	2	1.5	14	100FA2S4-PEXB	93616314
	3	2.2	22	100FA3S4-PEXB	93616322
	5	3.7	34	100FA5S4-PEXB	93616334
	7.5	5.5	42	100FA7S4-PEXB	93616342

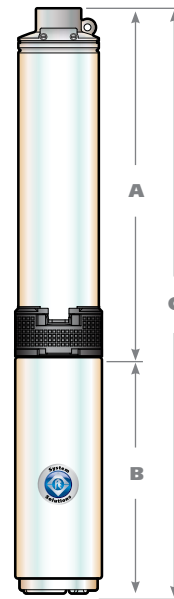

100 LPM Hi-Cap Dimensional Data Stainless Steel


LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
100	3/4	0.55	382	298	678	382	298	678	4
	1	0.75	446	298	742	446	384	828	5
	1.5	1.1	510	346	853	510	384	892	5
	2	1.5	638	488	1123	638	564	1199	5
	3	2.2	893	564	1455	893	716	1607	6
	5	3.7	1325	589	1914	1325	741	2066	12
	7.5	5.5	1581	741	2322	N/A	N/A	N/A	14

Note: P.E. – Pump end only
 Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.
 Maximum diameter with cable guard is 99.1 mm

50 Hz High Capacity



100 LPM High Capacity Performance Curves

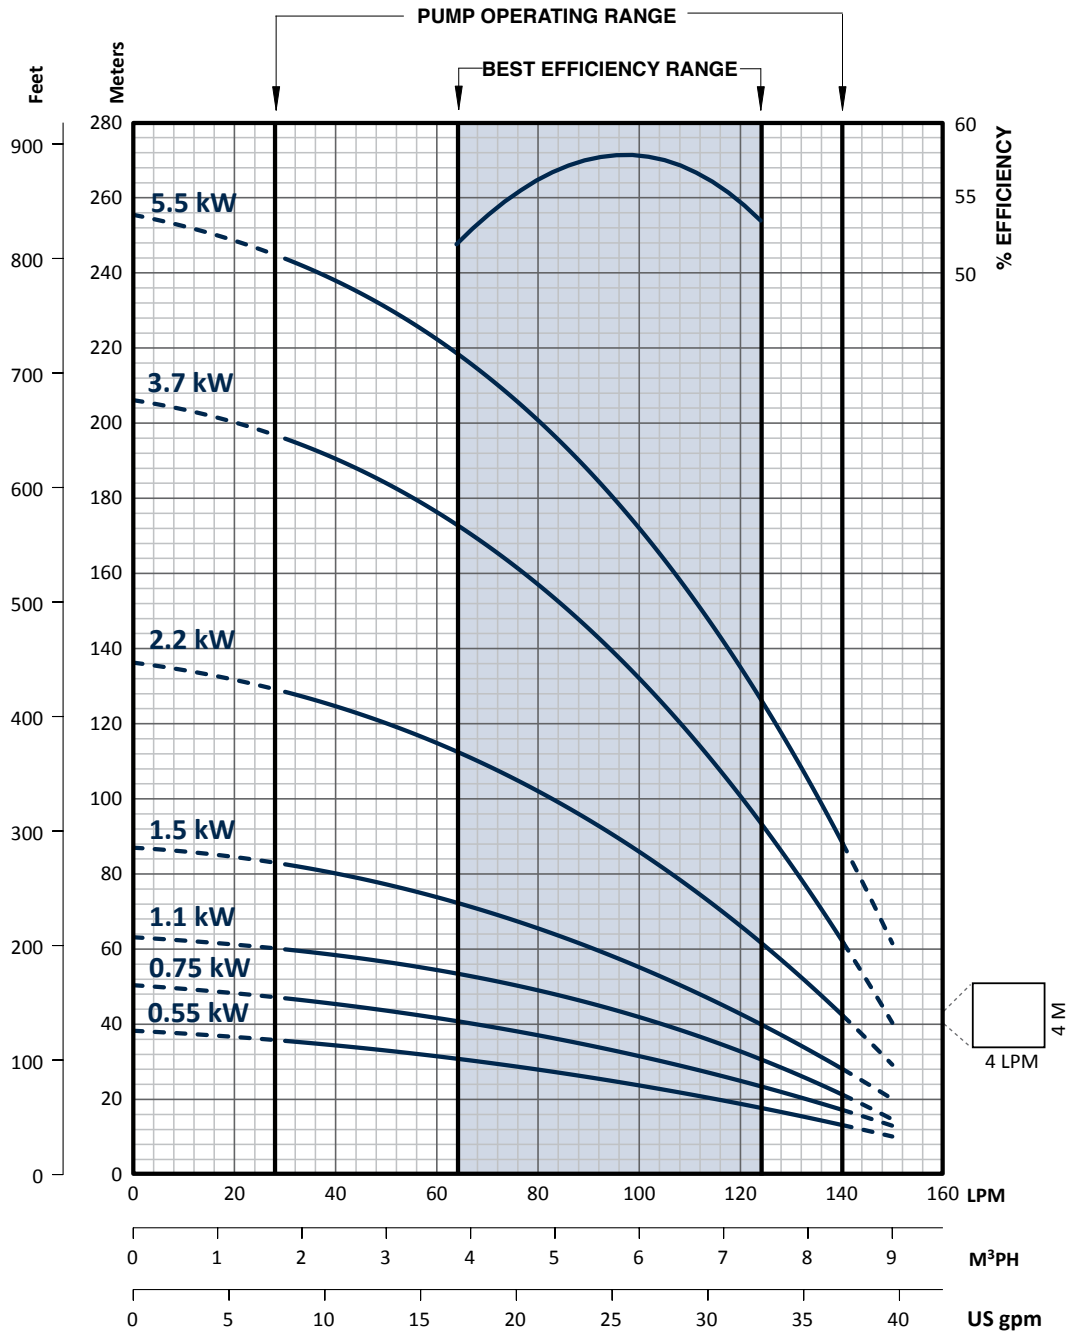


50 Hz High Capacity

150 LPM High Capacity

150 LPM Hi-Cap Ordering Information Stainless Steel

LPM	HP	kW	Stages	Model Description	Order No.
150	1.5	1.1	7	150FA15S4-PEXB	93616407
	2	1.5	9	150FA2S4-PEXB	93616409
	3	2.2	14	150FA3S4-PEXB	93616414
	5	3.7	26	150FA5S4-PEXB	93616426
	7.5	5.5	31	150FA7S4-PEXB	93616431

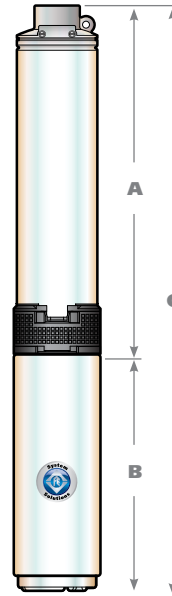

150 LPM Hi-Cap Dimensional Data Stainless Steel


LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
150	1.5	1.1	593	298	891	593	384	977	5
	2	1.5	707	346	1053	707	384	1091	5
	3	2.2	993	513	1506	993	589	1582	6
	5	3.7	1679	589	2268	1679	741	2420	8
	7.5	5.5	1989	742	2731	N/A	N/A	N/A	17

Note: P.E. – Pump end only
 Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.
 Maximum diameter with cable guard is 99.1 mm

50 Hz High Capacity



150 LPM High Capacity Performance Curves

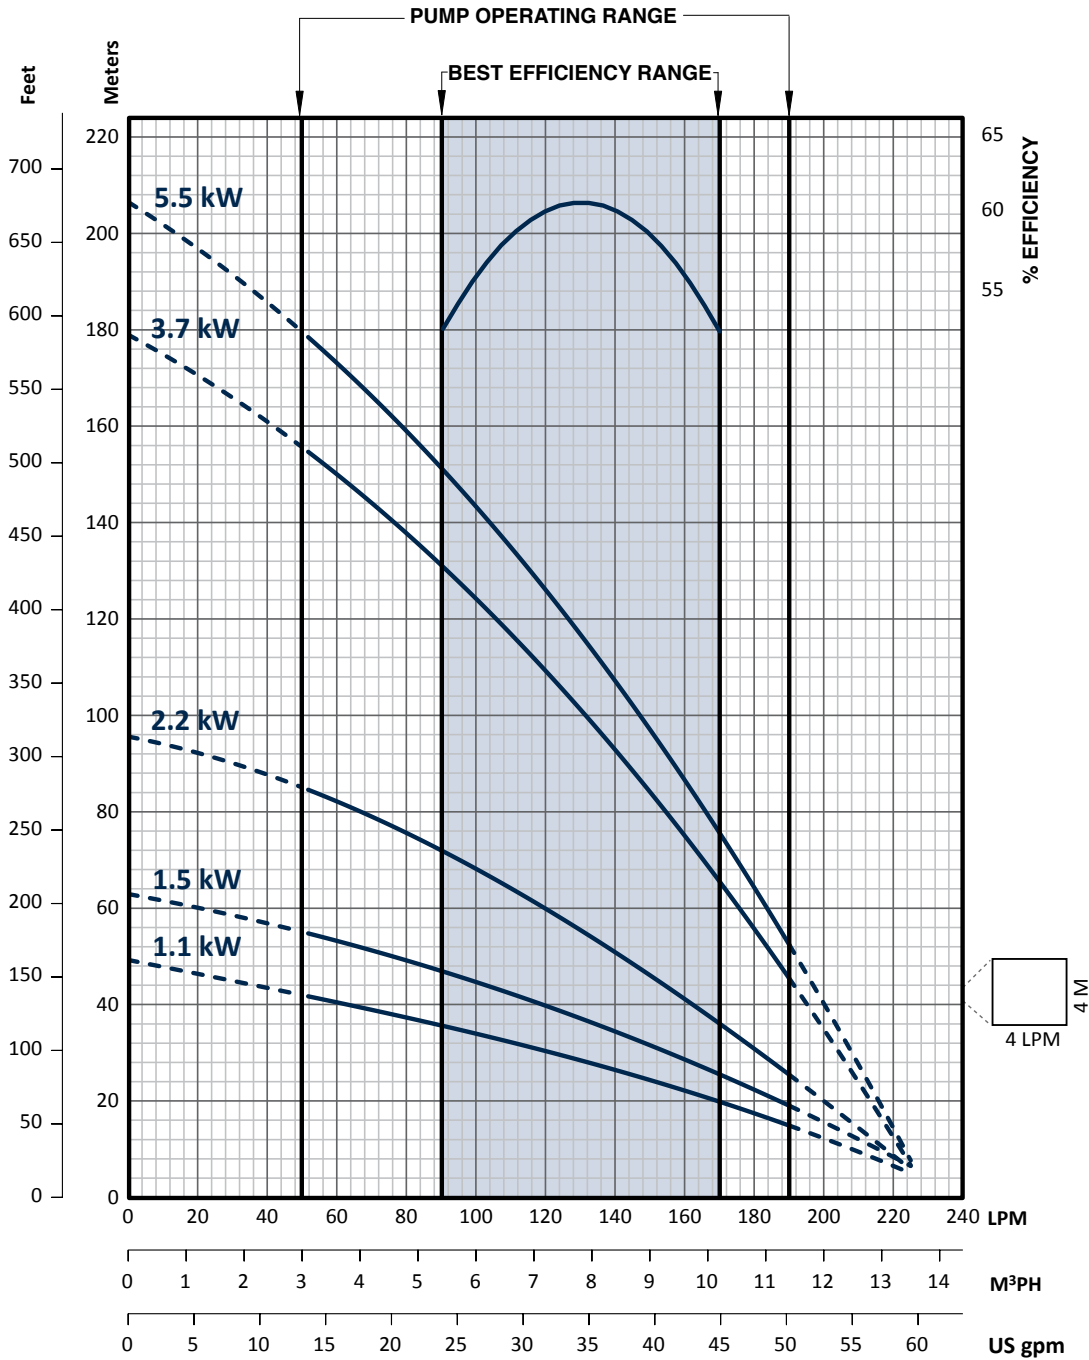


50 Hz High Capacity



200 LPM High Capacity

200 LPM Hi-Cap Ordering Information Stainless Steel

LPM	HP	kW	Stages	Model Description	Order No.
200	2	1.5	6	200FA2S4-PEXB	93616606
	3	2.2	9	200FA3S4-PEXB	93616609
	5	3.7	17	200FA5S4-PEXB	93616617
	7.5	5.5	26	200FA7S4-PEXB	93616626

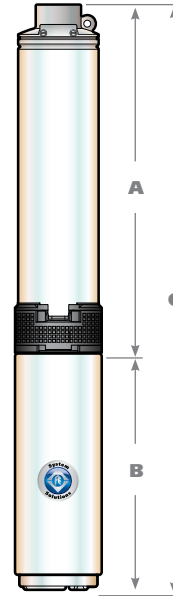

200 LPM Hi-Cap Dimensional Data Stainless Steel


LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
200	2	1.5	536	346	882	536	384	920	7
	3	2.2	707	488	1195	707	564	1271	8
	5	3.7	1164	589	1753	1164	741	1905	10
	7.5	5.5	1679	741	2496	NA	NA	NA	11

Note: P.E. – Pump end only
 Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.
 Maximum diameter with cable guard is 99.1 mm

50 Hz High Capacity



200 LPM High Capacity Performance Curves

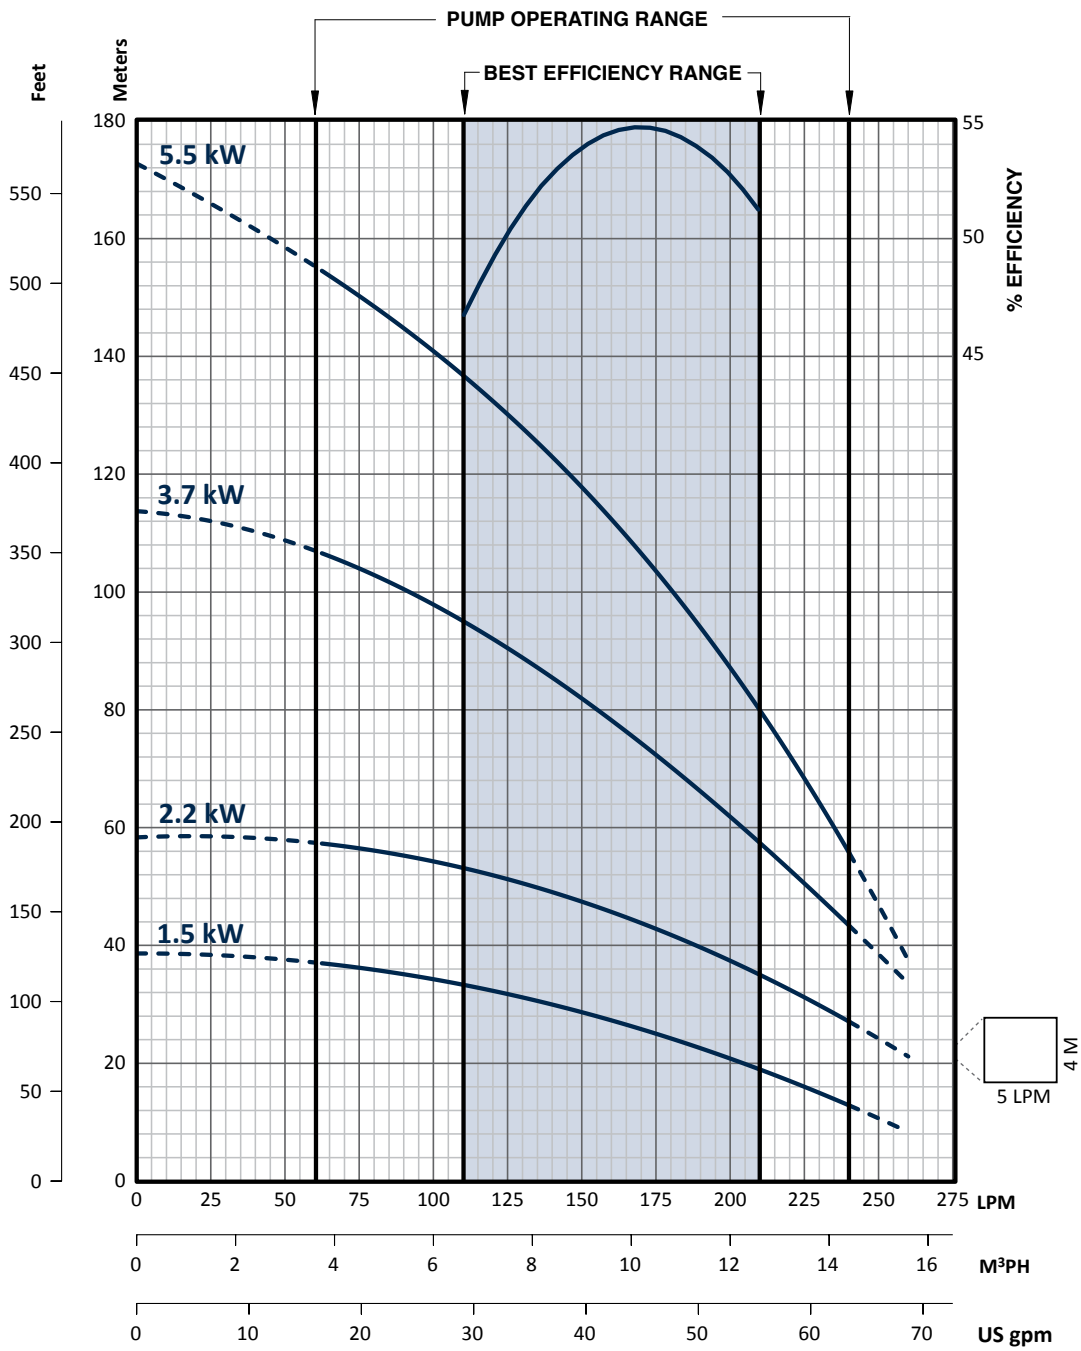


50 Hz High Capacity

270 LPM High Capacity

270 LPM Hi-Cap Ordering Information Stainless Steel

LPM	HP	kW	Stages	Model Description	Order No.
270	1.5	1.1	5	270FA15S4-PEXB	93616905
	2	1.5	7	270FA2S4-PEXB	93616907
	3	2.2	11	270FA3S4-PEXB	93616911
	5	3.7	19	270FA5S4-PEXB	93616919
	7.5	5.5	24	270FA7S4-PEXB	93616924

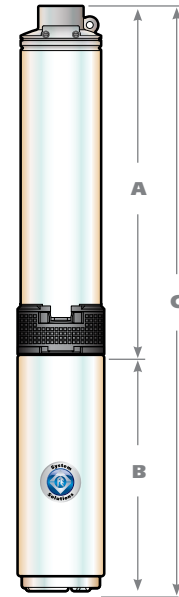

270 LPM Hi-Cap Dimensional Data Stainless Steel


LPM	HP	kW	3-Phase			3-Wire			P.E. Weight (kg)
			A (mm)	B (mm)	C (mm)	A (mm)	B (mm)	C (mm)	
270	1.5	1.1	575	298	873	575	384	959	5
	2	1.5	728	346	1074	728	384	1112	5
	3	2.2	1033	513	1546	1033	589	1622	6
	5	3.7	1641	589	2230	1641	741	2382	10
	7.5	5.5	2012	741	2753	NA	NA	NA	14

Note: P.E. – Pump end only
 Product dimensions assume the FPS pump end is assembled to a 4" Franklin Electric submersible motor.
 Maximum diameter with cable guard is 99.1 mm

50 Hz High Capacity



270 LPM High Capacity Performance Curves

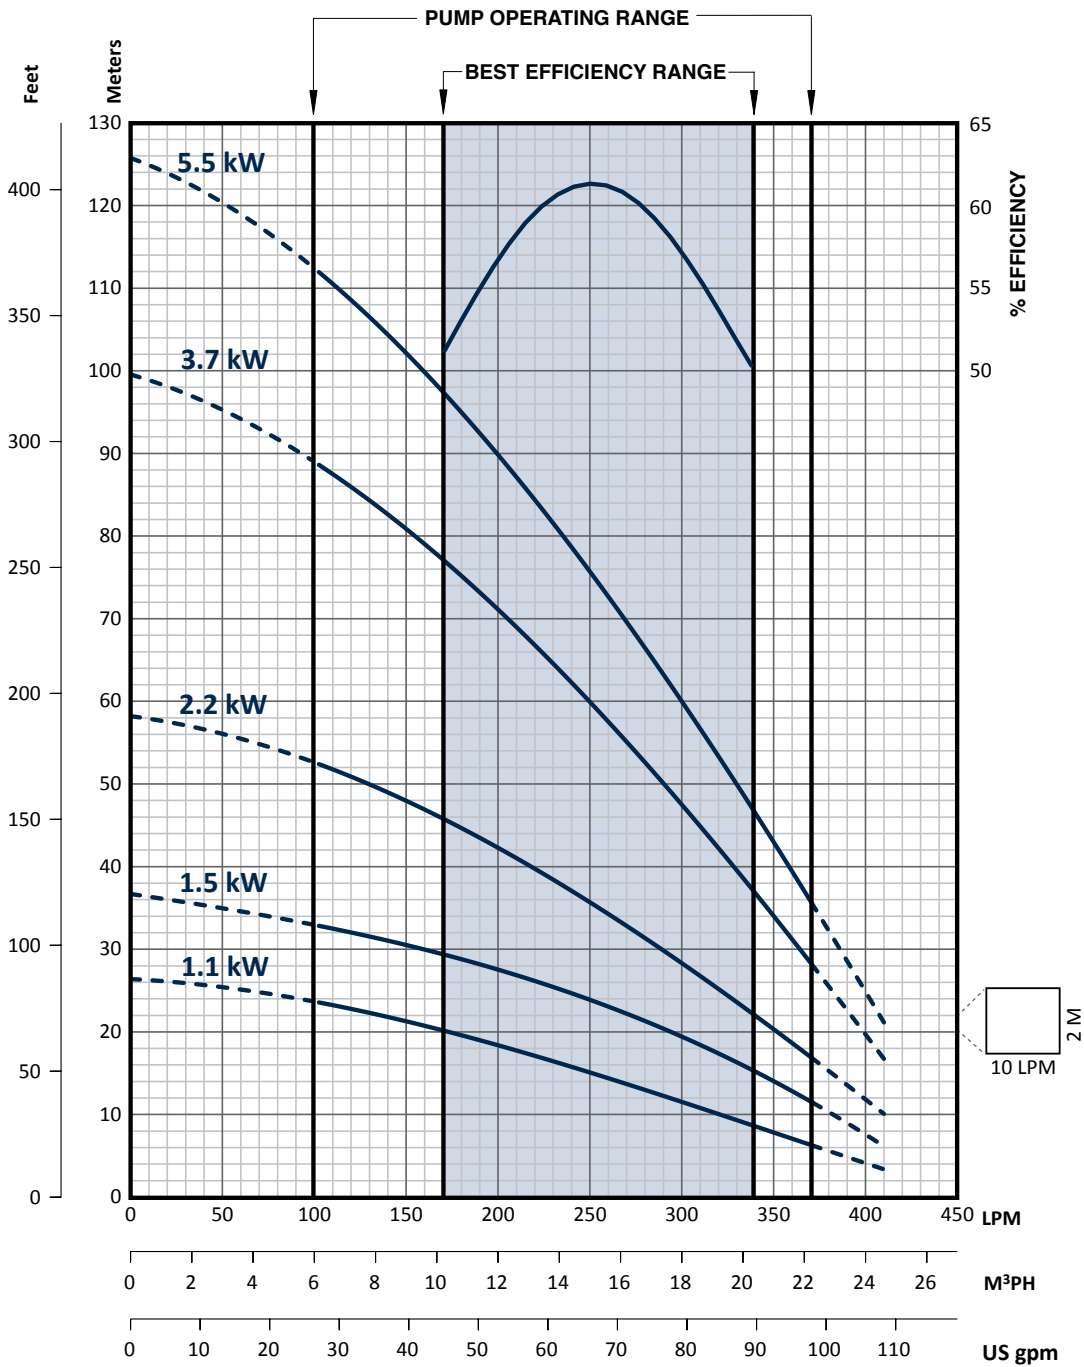

ASEAN

Franklin Electric (SEA) Pte. Ltd.
17 Changi Business Park Central 1
06-05, Honeywell Building
Singapore 486 073

Phone: +65.6789.6865

Fax: +65.6789.0155

CHINA

Franklin Electric (Shanghai) Co. Ltd.
Unit 1002-03, Shanghai Central Plaza
No. 227, Huang Pi Bei Road,
Shanghai 200003, China

Phone: +86.21.6327.0909

Fax: +86.21.6327.0910

INDIA

Franklin Electric India Pvt. Ltd.
DBS-206, 1st Floor
World Trade Tower
Barakhamba Avenue
New Delhi 110 001, India

Tel: +91.11.4308.4697

Fax: +91.11.2341.4740

AUSTRALIA / NEW ZEALAND

Franklin Electric (Australia) Pty. Ltd.
106 - 110 Micro Circuit
Dandenong South, Victoria 3175
Australia

Phone: +61.3.9799.5000

Fax: +61.3.9799.5050

Hotline: 1.300 FRANKLIN (1.300.372.655)

LATIN AMERICA

Motores Franklin S.A. de C.V.
Avenida Churubusco #1600
(Bodega #16)
Col. Francisco I. Madero
Monterrey, N.L.
Mexico C.P. 64560

Phone: +52.81.8000.1000

Fax: +52.818.864.8445

UNITED STATES

Franklin Electric Co., Inc.
400 E. Spring St.
Bluffton, IN 46714 USA

Phone: +1.260.824.2900

Fax: +1.260.824.2909



Franklin Electric
www.franklin-electric.com